



P U M P

Utility, Sump, Effluent, Sewage and Grinder Pumps for Residential and Onsite Applications



## Ashland Pump

Ashland Pump is located in Ashland, Ohio and manufactures a complete line of pump products for the Residential Wholesale market. We are a family owned business with over 35 years of experience manufacturing pumps. Our commitment to you, our customer, is to offer a quality, dependable product with unmatched customer service. To support that, we stock thousands of pumps in our 130,000 sq. foot warehouse and know that having inventory on-hand for our customers is important. We are thoroughly committed to supporting the Professional marketplace with a full line of Sump, Sewage, Effluent and Grinder pumps for the Residential market.

Ashland Pump products are proudly sold through the Professional channel in the Plumbing Wholesale, On-Site Septic and Commercial markets. Our products feature only the highest quality components and time tested and professional approved materials.

- Heavy Duty Cast Iron
- Energy Efficient Motors
- Piggy-back SJ Rhombus Switches
- Professional-duty ball bearing design

We believe that in business, as in every other area of life, we will hold ourselves to be Honest, Professional and Dependable. This is true for our brand as well as the people that make up the company.



## Outstanding Construction

### HEAVY DUTY CAST IRON

Rugged design, great heat dissipation

### OIL-FILLED CONTINUOUS DUTY MOTORS

Higher efficiency, lower amp draw, long life

### DOUBLE BALL BEARING DESIGN

Double row, angular contact lower bearing, low maintenance, longer mean time between repairs, handles radial and thrust loading

### APPLICATION SPECIFIC IMPELLERS

Thermoplastic, brass and cast iron variations, vortex impellers reduce pump clogging, two-vane enclosed impellers provide better efficiency while remaining clog free, replaceable wear rings to restore original performance

**HONEST PROFESSIONAL DEPENDABLE**



### Utility and Sump Pumps



### Effluent Pumps



### Sewage Pumps



### Grinder Pumps



# UTILITY PUMPS

## Model: UT57

Heavy Duty High Capacity  
Utility Pump




### Features

- Designed For Large Water Transfer Jobs
- Heavy Duty Cast Iron
- Capable Of Boosting Household Water Pressure

### Specifications

DISCHARGE SIZE	3/4" NPT
MOTOR HOUSING	Cast Iron
IMPELLER	Thermoplastic
SEAL TYPE	Mechanical
MOTOR TYPE	Brush Type
HP	1/2
VOLTAGE	115
FULL LOAD AMPS	8.0

### Performance Curve

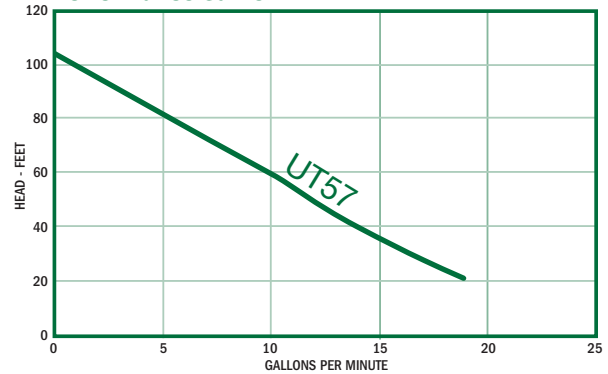

## Models: UT56 and UT80

Submersible Utility Pumps




### Features

- Designed To Pump 1/8" Solids
- Continuous Duty Psc Motor
- Ideal For Pool Covers, Irrigation And Flooded Areas

### Specifications

DISCHARGE SIZE	1-1/4" NPT
MOTOR HOUSING	Thermoplastic
IMPELLER	Thermoplastic
SEAL TYPE	Standard
MOTOR TYPE	PSC
HP	1/3 (UT56) and 1/2 (UT80)
VOLTAGE	115
FULL LOAD AMPS	3.3 for both

### Performance Curve

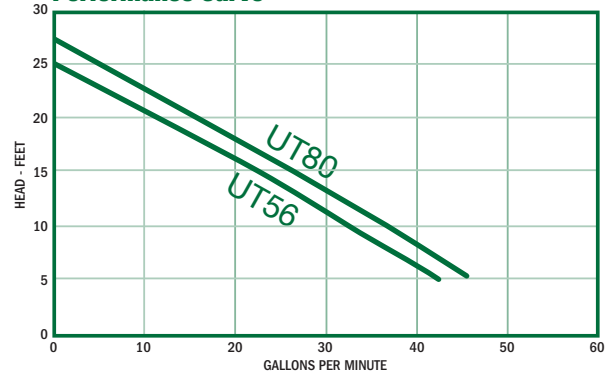

## Model: AC15

Condensate Pump



### Features

- Designed For Removal Of Condensate From Furnaces, Air Conditioners, Dehumidifiers And Other Types Of Equipment.
- Safety Switch To Automatically Shut Down Equipment In Case Of Power Failure.
- High Impact Thermoplastic Tank.
- Wall Mounts And Removable Built-In Check Valve Included.
- Three Intake Holes.
- 3/8" Outlet.

### Specifications

DISCHARGE SIZE	3/8"
MOTOR HOUSING	Thermoplastic
IMPELLER	Thermoplastic
HP	1/12
VOLTAGE	115
FULL LOAD AMPS	1.5
CAPACITY	100 GPH @ 0 Head
MAXIMUM HEAD	18'

# SUMP PUMPS

## Models: PED33 and PED50

Pedestal Sump Pumps



### Models


- PED33 and PED50 - Thermoplastic
- PED33CI and PED50CI - Cast Iron
- PED33B and PED50B - Brass

### Features

- Column Style Sump Pump
- Available In Thermoplastic, Cast Iron And Bronze
- Non-Clogging Vortex Impeller

### Specifications

DISCHARGE SIZE	1-1/2" NPT, 1-1/4" NPT (PEDB)
MOTOR HOUSING	Steel
IMPELLER	Thermoplastic, SS (PEDCI) Bronze (PEDB)
SEAL TYPE	Lip
MOTOR TYPE	PSC
HP	1/3 (PED33) and 1/2 (PED50)
VOLTAGE	115
FULL LOAD AMPS	4.0 (PED33), 5.2 (PED50)

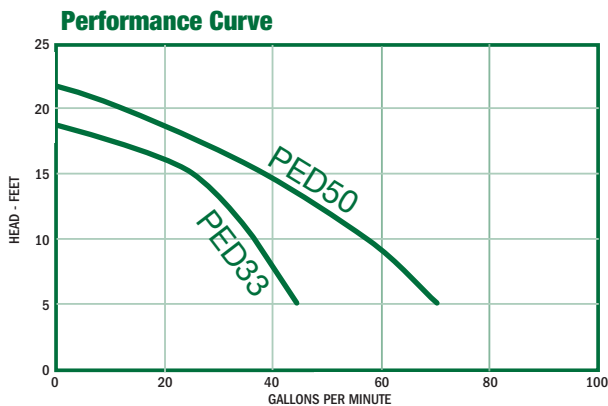

## Model: APBS

Battery Backup System




### Features

- Automatically Functions During Power Outages
- Audible And Visual Alarms
- High Capacity 12V DC Pump
- Fully Recharge Depleted Battery In 24-48 Hours

### Specifications

DISCHARGE SIZE	1-1/4" NPT
MOTOR HOUSING	Thermoplastic
IMPELLER	Thermoplastic
SEAL TYPE	Lip
MOTOR TYPE	DC
HP	DC12V
VOLTS @ 60Hz	DC12V
AMPS	16

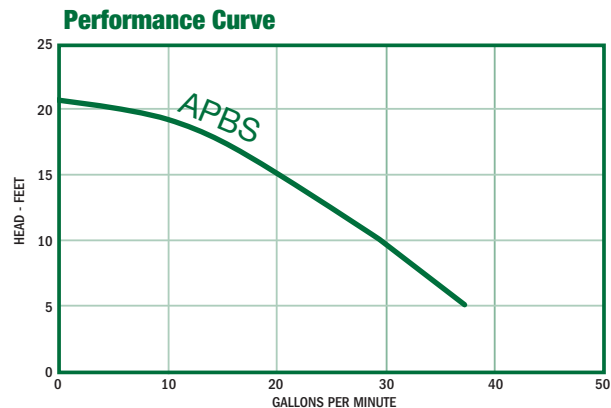


# SUMP PUMPS

## Models: PS33 and PS50

Submersible Sump Pumps



**Performance Curve**

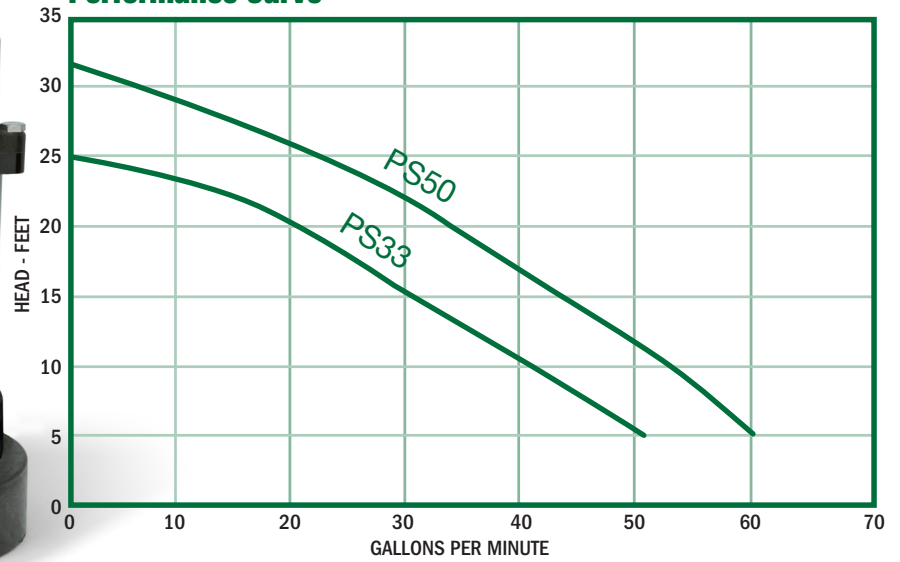

### Features

- Corrosion Resistant
- Anodized Aluminium Construction
- Continuous Duty, Low Amp Drawing PSC Motor
- Available In Multiple Switch Configurations
- Vortex Thermoplastic Impeller
- 1-1/2" NPT Discharge

### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Cord Type
PS33M1-10	1/3	60	115	3450	5.3	SJTW 18/3C
PS33W1-10	1/3	60	115	3450	5.3	SJTW 18/3C
PS33V1-10	1/3	60	115	3450	5.3	SJTW 18/3C
PS50M1-10	1/2	60	115	3450	7.0	SJTW 18/3C
PS50W1-10	1/2	60	115	3450	7.0	SJTW 18/3C
PS50V1-10	1/2	60	115	3450	7.0	SJTW 18/3C


# SUMP PUMPS

## Models: B33 and B50

Cast Iron Sump Pumps




### Performance Curve

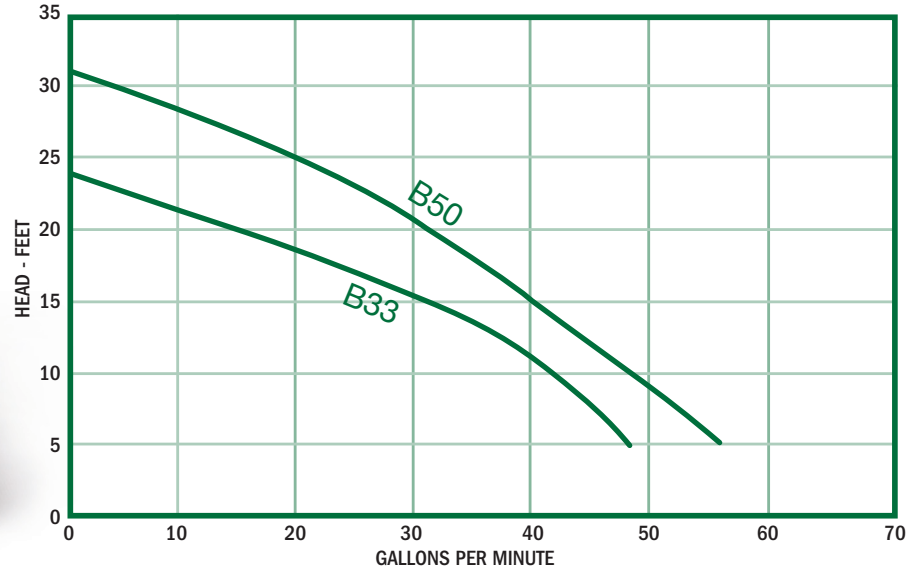

### Features

- Heavy Duty Cast Iron Construction
- Strong PSC Continuous Duty Rated Motor
- Recessed Vortex Impeller To Reduce Clogging
- Piggyback Plug Standard
- 1-1/2" Discharge



Piggyback Switch Plug

### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Cord Type
B33M1-10	1/3	60	115	3450	5.0	SJTW 18/3C
B33W1-10	1/3	60	115	3450	5.0	SJTW 18/3C
B33V1-10	1/3	60	115	3450	5.0	SJTW 18/3C
B50M1-10	1/2	60	115	3450	7.0	SJTW 18/3C
B50W1-10	1/2	60	115	3450	7.0	SJTW 18/3C
B50V1-10	1/2	60	115	3450	7.0	SJTW 18/3C
B33M1-10LK	1/3	60	115	3450	5.0	SJTW 18/3C
B33W1-10LK	1/3	60	115	3450	5.0	SJTW 18/3C
B33V1-10LK	1/3	60	115	3450	5.0	SJTW 18/3C
B50M1-10LK	1/2	60	115	3450	7.0	SJTW 18/3C
B50W1-10LK	1/2	60	115	3450	7.0	SJTW 18/3C
B50V1-10LK	1/2	60	115	3450	7.0	SJTW 18/3C



Optional plastic legs  
P/N: 091BLEGX


# SUMP PUMPS

## Model SPV33 and SPV50

Cast Iron Sump Pumps



### Performance Curve

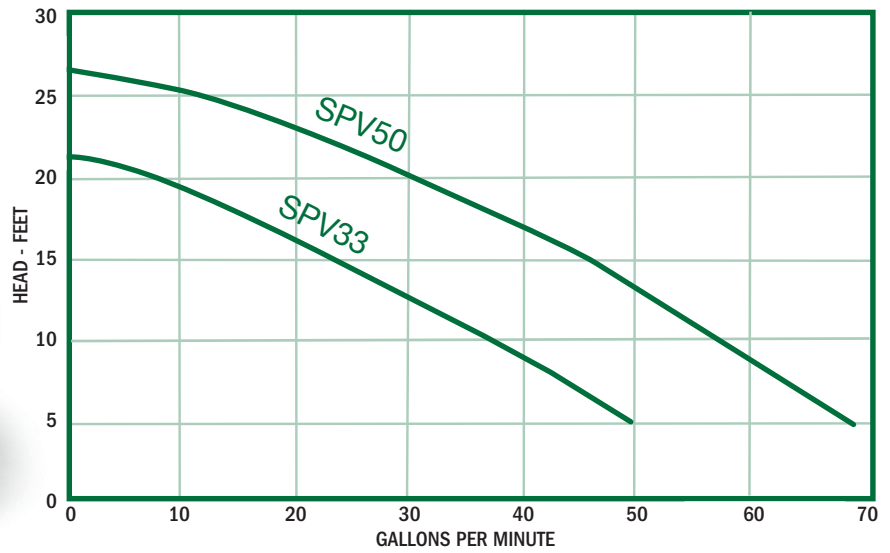

### Features

- PSC Continuous Duty Rated Motor
- Upper And Lower Ball Bearing Design For Longer Life And Smoother Operation
- Rugged Cast Iron Construction
- Vortex Thermoplastic Impeller (SPV33)
- Vortex Cast Iron Impeller (SPV50)
- 1-1/2" Discharge

### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Cord Type
SPV33	1/3	60	115	1750	6.5	SJTW 18/3C
SPV50	1/2	60	115	1750	10.0	SJTW 18/3C




# EFFLUENT PUMPS

## Model: EPH30

High Head Cast Iron Effluent Pump



**Performance Curve**

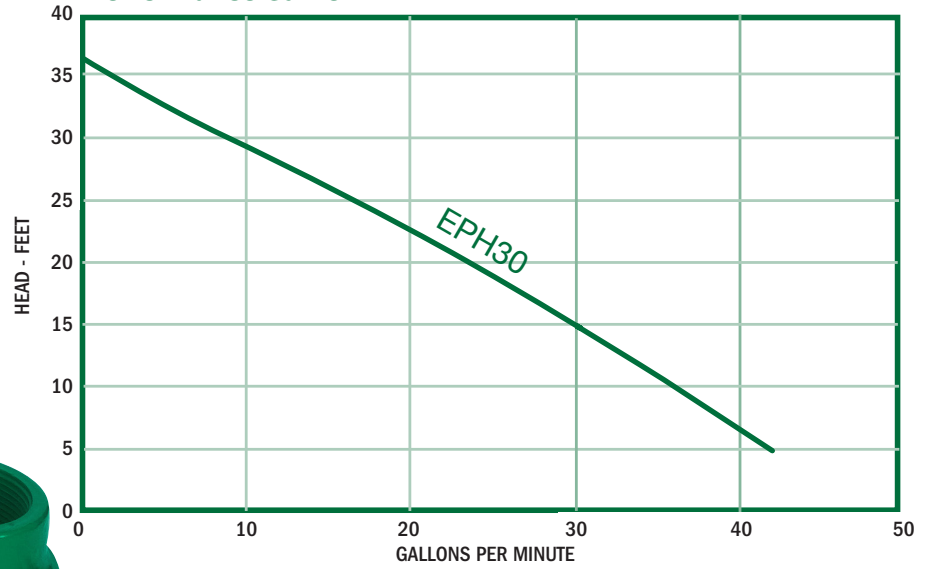

### Features

- Continuous duty rated PSC motor
- 3/4" solids handling
- All cast iron construction
- Recessed vortex cast iron impeller
- 1-1/2" NPT Discharge

### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Cord Type
EPH30M1-20	3/10	60	115	3450	7.0	SJTW 18/3C
EPH30M2-20	3/10	60	230	3450	3.5	SJTW 18/3C
EPH30W1-20	3/10	60	115	3450	7.0	SJTW 18/3C
EPH30W2-20	3/10	60	230	3450	3.5	SJTW 18/3C


# EFFLUENT PUMPS

## Model EPF30

High Flow Cast Iron Effluent Pumps



**Performance Curve**

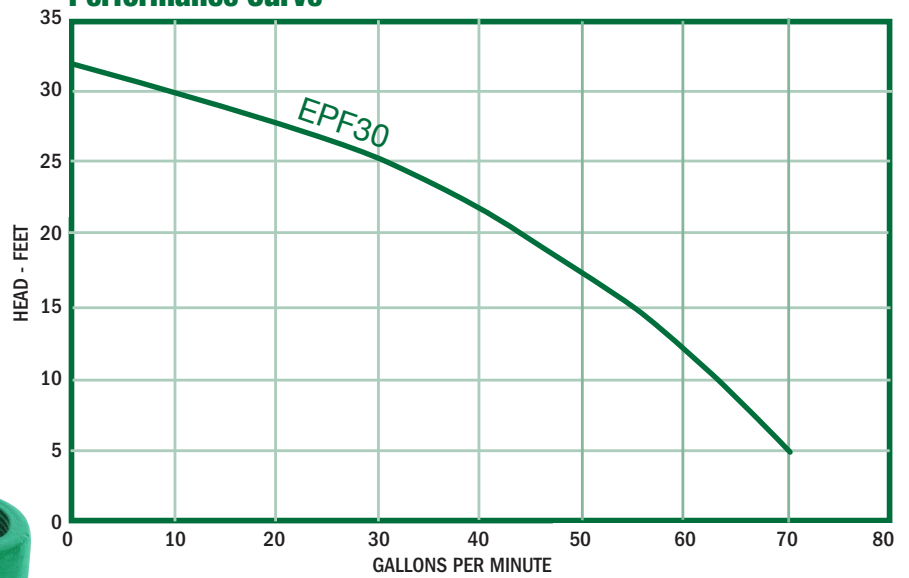

### Features

- Heavy-duty cast iron construction
- 3/10 HP continuous duty rated PSC motor
- Recessed Cast iron vortex impeller
- 3/4" solids handling
- 2" NPT Discharge

### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Nema Start Code	Cord Type	Cord Power Size	Cord O.D.
EPF30M1-20	3/10	60	115	3450	8.0	P	SJTW 18/3C	18AWG/3C	.34
EPF30M2-20	3/10	60	230	3450	4.0	P	SJTW 18/3C	18AWG/3C	.34
EPF30W1-20	3/10	60	115	3450	8.0	P	SJTW 18/3C	18AWG/3C	.34
EPF30W2-20	3/10	60	230	3450	4.0	P	SJTW 18/3C	18AWG/3C	.34


# EFFLUENT PUMPS

## Models: EP40 and EP45

Cast Iron Effluent Pumps



**Performance Curve**

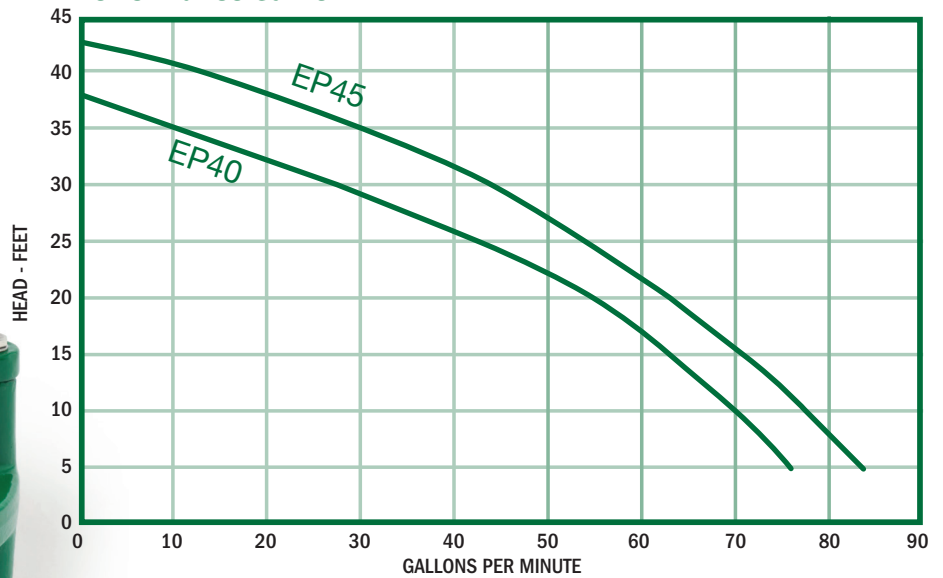

### Features

- Heavy-Duty Cast Iron Construction
- Continuous Duty Rated PSC Motor
- Upper And Lower Ball Bearing Design
- Cast Iron Vortex Impeller
- 3/4" Solids Handling
- Recessed Vortex Cast Iron Impeller
- 2" NPT Discharge

### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Nema Start Code	Cord Type	Cord Power Size	Cord O.D.
EP40M1-20	4/10	60	115	3450	9.0	P	SJTW 18/3C	16AWG/3C	.34
EP40M2-20	4/10	60	230	3450	4.5	P	SJTW 18/3C	16AWG/3C	.34
EP40W1-20	4/10	60	115	3450	9.0	P	SJTW 18/3C	16AWG/3C	.34
EP40W2-20	4/10	60	230	3450	4.5	P	SJTW 18/3C	16AWG/3C	.34
EP45M1-20	1/2	60	115	3450	11.0	P	SJTW 18/3C	16AWG/3C	.34
EP45M2-20	1/2	60	230	3450	5.5	P	SJTW 18/3C	16AWG/3C	.34
EP45W1-20	1/2	60	115	3450	11.0	P	SJTW 18/3C	16AWG/3C	.34
EP45W2-20	1/2	60	230	3450	5.5	P	SJTW 18/3C	16AWG/3C	.34


# EFFLUENT PUMPS

## Models: EP50, EP75, EP100 and EP150

Cast Iron Effluent Pumps



Performance Curve

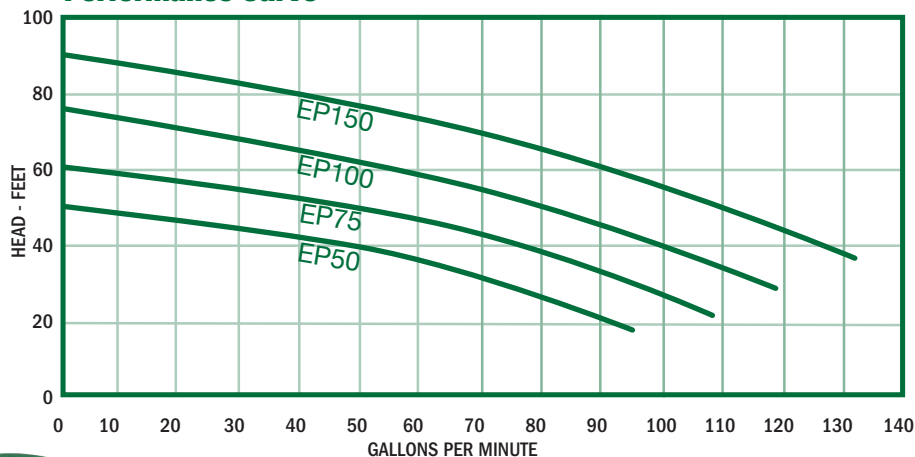

### Features

- Heavy-Duty Cast Iron Construction
- Oil-Filled Continuous Duty Rated PSC Motor
- Upper And Lower Ball Bearing Design
- Recessed Cast Iron Vortex Impeller
- 3/4" Solids Handling

### Specifications

MODEL	HP	HZ	VOLTS/PH	RPM	FULL LOAD AMPS	NEMA START CODE	CORD TYPE	CORD SIZE	CORD O.D.	BREAKER SIZE	RUN CAPACITOR
EP50M1-20	1/2	60	115/1	3450	12.0	J	SOW	16AWG/3C	0.385-0.430	15A	370V 35MFD±5%
EP50M2-20	1/2	60	230/1	3450	6.0	J	SOW	16AWG/3C	0.385-0.430	10A	370V 35MFD±5%
EP50M3-20	1/2	60	230/3	3450	3.2	J	SOW	16AWG/4C	0.410-0.460	5A	N/A
EP50M4-20	1/2	60	460/3	3450	1.6	J	SOW	16AWG/4C	0.410-0.460	3A	N/A
EP50M5-20	1/2	60	208/1	3450	6.5	J	SOW	16AWG/3C	0.385-0.430	10A	450V 35MFD±5%
EP50M6-20	1/2	60	208/3	3450	3.5	J	SOW	16AWG/4C	0.410-0.460	5A	N/A
EP75M2-20	3/4	60	230/1	3450	8.0	H	SOW	16AWG/3C	0.385-0.430	10A	450V 35MFD±5%
EP75M3-20	3/4	60	230/3	3450	4.7	H	SOW	16AWG/4C	0.410-0.460	5A	N/A
EP75M4-20	3/4	60	460/3	3450	2.3	H	SOW	16AWG/4C	0.410-0.460	3A	N/A
EP75M5-20	3/4	60	208/1	3450	8.2	H	SOW	16AWG/3C	0.385-0.430	10A	450V 35MFD±5%
EP75M6-20	3/4	60	208/3	3450	5.0	H	SOW	16AWG/4C	0.410-0.460	5A	N/A
EP100M2-20	1	60	230/1	3450	11.8	H	SOW	16AWG/3C	0.385-0.430	15A	450V 35MFD±5%
EP100M3-20	1	60	230/3	3450	6.0	H	SOW	16AWG/4C	0.410-0.460	10A	N/A
EP100M4-20	1	60	460/3	3450	3.0	H	SOW	16AWG/4C	0.410-0.460	5A	N/A
EP100M5-20	1	60	208/1	3450	12.0	H	SOW	16AWG/3C	0.385-0.430	15A	450V 35MFD±5%
EP100M6-20	1	60	208/3	3450	6.2	H	SOW	16AWG/4C	0.410-0.460	10A	N/A
EP150M2-20	1-1/2	60	230/1	3450	15.0	G	SOW	14AWG/3C	0.520-0.575	20A	450V 35MFD±5%
EP150M3-20	1-1/2	60	230/3	3450	7.4	G	SOW	16AWG/4C	0.410-0.460	10A	N/A
EP150M4-20	1-1/2	60	460/3	3450	3.7	G	SOW	16AWG/4C	0.410-0.460	5A	N/A
EP150M5-20	1-1/2	60	208/1	3450	15.2	G	SOW	14AWG/3C	0.520-0.575	20A	450V 35MFD±5%
EP150M6-20	1-1/2	60	208/3	3450	7.8	G	SOW	16AWG/4C	0.410-0.460	10A	N/A

# EFFLUENT PUMPS

## Models: CPM


Cistern Pumps



### Applications

- Filtered effluent water pumping
- Gray water pumping
- Water feature/ Aeration applications
- Rain water basin applications

### Performance Curve

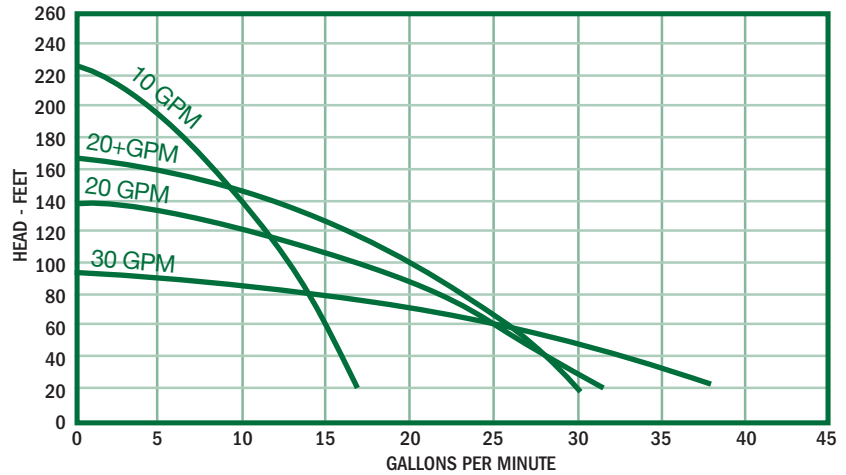

### Features

- Bottom Suction Design For Maximum Drawdown
- Able To Pass 1/8" Solids
- Available In 10, 20, And 30 GPM Flow Rates
- 1/2 HP, 115V And 230V Single Phase Motors
- Heavy Duty Discharge With Stainless Steel Internal Threads
- 600 Volt, 10' SJ00W Jacketed Lead
- High Shut-Off Pressure
- Quiet Operation
- Standard Removable Base For Stable Mounting

### Specifications

Model/Order No.	GPM	HP	Voltage/Ph.	Stage Count	Length (in.)	Shipping Wt. (lbs.)
10CPM115	10	1/2	115/1	7	26	17
10CPM230	10		230/1	7	26	17
20CPM115	20		115/1	5	25	16
20CPM230	20		230/1	5	25	16
20+CPM115	20+		115/1	6	26	17
20+CPM230	20+		230/1	6	26	17
30CPM115	30		115/1	4	25	16
30CPM230	30		230/1	4	25	16


# SEWAGE PUMPS

## Models: SW40/50/75

Cast Iron Sewage Pumps



Performance Curve

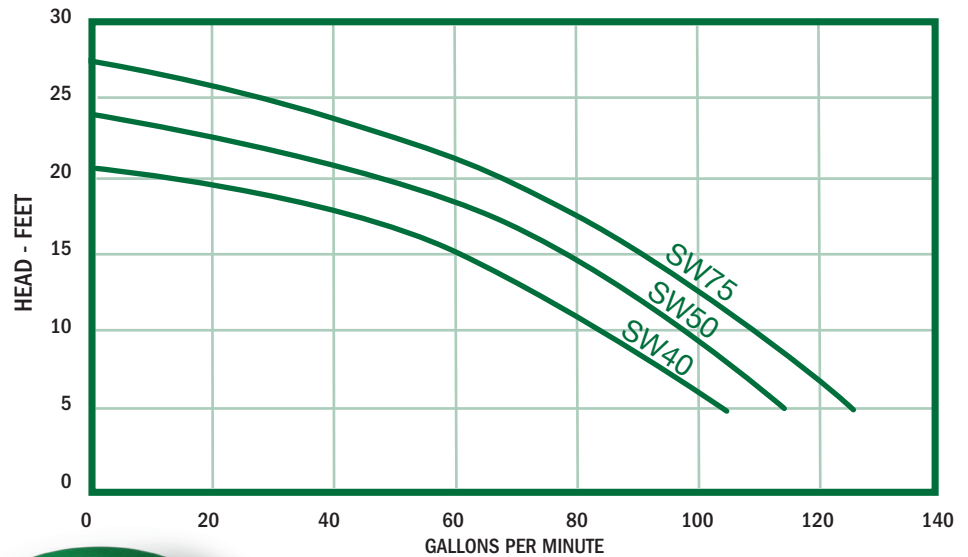

### Features

- 2" NPT Discharge
- Cast Iron Impeller
- Cast Iron Motor Housing
- Single Mechanical Carbon Ceramic Seal
- 20' Cable
- Handles 2" Solids

### Specifications

Model	HP	Volt	Ph	Nema Start Code	Full Load Amps	Cord Size	Cord Type	Cord O.D. Inches (mm)
SW40M1-20	4/10	115	1	R	9.0	16AWG/3C	SJTOW	.325-.360
SW40M2-20	4/10	230	1	R	4.5	16AWG/3C	SJTOW	.325-.360
SW50M1-20	1/2	115	1	P	9.5	16AWG/3C	SJTOW	.325-.360
SW50M2-20	1/2	230	1	P	4.8	16AWG/3C	SJTOW	.325-.360
SW50M3-20	1/2	230	3	R	3.0	16AWG/4C	SJTOW	.325-.360
SW50M4-20	1/2	460	3	R	1.5	16AWG/4C	SJTOW	.325-.360
SW50M5-20	1/2	208	1	P	5.2	16AWG/3C	SJTOW	.325-.360
SW50M6-20	1/2	208	3	R	3.1	16AWG/4C	SJTOW	.325-.360
SW75M1-20	3/4	115	1	P	10.5	16AWG/3C	SJTOW	.325-.360
SW75M2-20	3/4	230	1	P	5.3	16AWG/3C	SJTOW	.325-.360
SW75M3-20	3/4	230	3	R	3.2	16AWG/4C	SJTOW	.325-.360
SW75M4-20	3/4	460	3	R	1.6	16AWG/4C	SJTOW	.325-.360
SW75M5-20	3/4	208	1	P	5.8	16AWG/3C	SJTOW	.325-.360
SW75M6-20	3/4	208	3	R	3.3	16AWG/4C	SJTOW	.325-.360


# SEWAGE PUMPS

## Model: SWS50V

Cast Iron Sewage Pumps



### Performance Curve

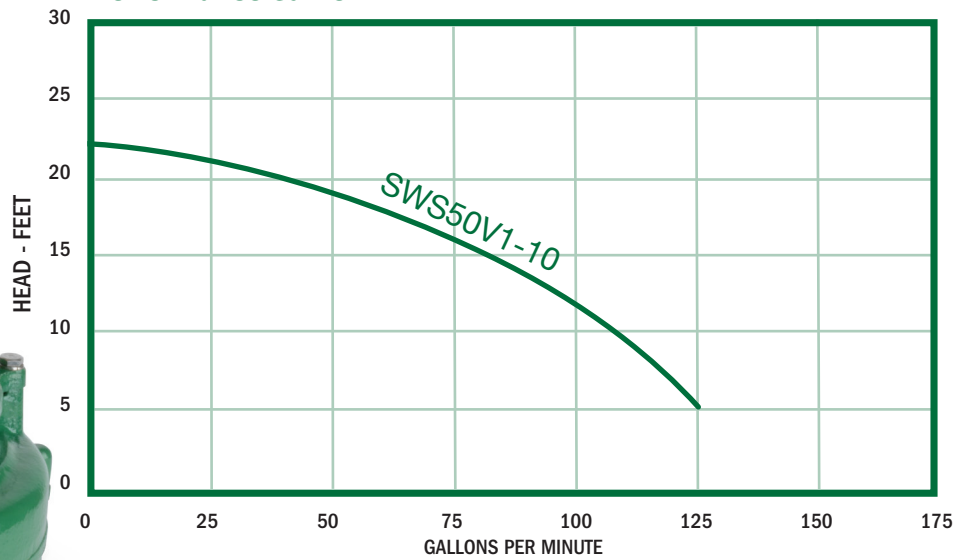

### Features

- 2" NPT Discharge
- Vortex - Thermoplastic Impeller
- Cast Iron Motor Housing and Volute
- Single Mechanical Carbon Ceramic Seal
- 10' Power Cord
- Handles 2" Solids

### Specifications

Model	HP	Volt	Ph	Nema Start Code	Full Load Amps	Cord Size	Cord Type	Cord O.D. Inches (mm)
SWS50V1-10	1/2	115	1	P	12.0	16AWG/3C	SJTOW	.325-.360
SWS50V2-10	1/2	230	1	P	6.0	16AWG/3C	SJTOW	.325-.360
SWS50V3-10	1/2	230	3	R	4.5	16AWG/4C	SJTOW	.350-.394
SWS50V4-10	1/2	460	3	R	2.3	16AWG/4C	SJTOW	.350-.394
SWS50V5-10	1/2	208	1	P	7.5	16AWG/3C	SJTOW	.325-.360
SWS50V6-10	1/2	208	3	R	4.7	16AWG/4C	SJTOW	.350-.394


# SEWAGE PUMPS

## Models: SWF100, SWF200, SWFD100, and SWFD200

Cast Iron Sewage Pumps




Performance Curve

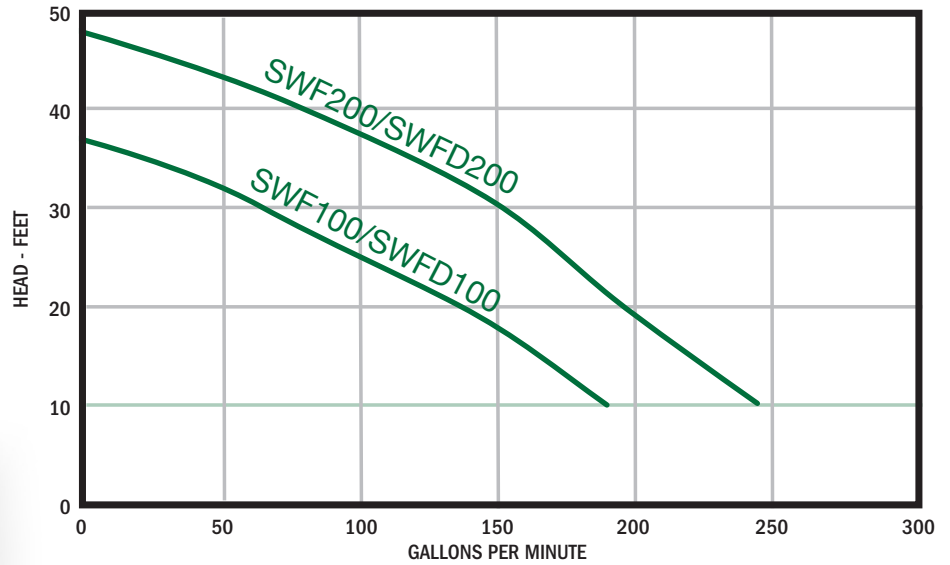

### Features

- 3" Flanged Discharge
- 2-Vane, Semi-open Cast Iron Impeller
- Cast Iron Motor Housing and Volute
- Mechanical Carbon Ceramic Seal
- 20' Cord
- Handles 2" Solids



### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Nema Start Code	Cord Type	Cord Power Size	Cord O.D.
SWF100M2-20/SWFD100M2-20	1	60	230/1	3450	10.8	P	SOW	14AWG/3C	.55
SWF100M3-20/SWFD100M3-20	1	60	230/3	3450	8.0	P	SOW	16AWG/4C	.45
SWF100M4-20/SWFD100M4-20	1	60	460/3	3450	4.0	P	SOW	16AWG/4C	.45
SWF100M5-20/SWFD100M5-20	1	60	208/1	3450	13.0	P	SOW	16AWG/4C	.45
SWF100M6-20/SWFD100M6-20	1	60	208/3	3450	8.5	P	SOW	16AWG/4C	.45
SWF200M2-20/SWFD200M2-20	2	60	230/1	1750	16.7	K	SOW	12AWG/3C	.62
SWF200M3-20/SWFD200M3-20	2	60	230/3	1750	11.0	L	SOW	14AWG/4C	.59
SWF200M4-20/SWFD200M4-20	2	60	460/3	1750	5.5	L	SOW	14AWG/4C	.59
SWF200M5-20/SWFD200M5-20	2	60	208/1	1750	21.0	K	SOW	12AWG/3C	.62
SWF200M6-20/SWFD200M6-20	2	60	208/3	1750	11.5	L	SOW	14AWG/4C	.59




# SEWAGE PUMPS

## Models: SWF300, SWF500, SWFD300 and SWFD500

Cast Iron Sewage Pumps




Performance Curve

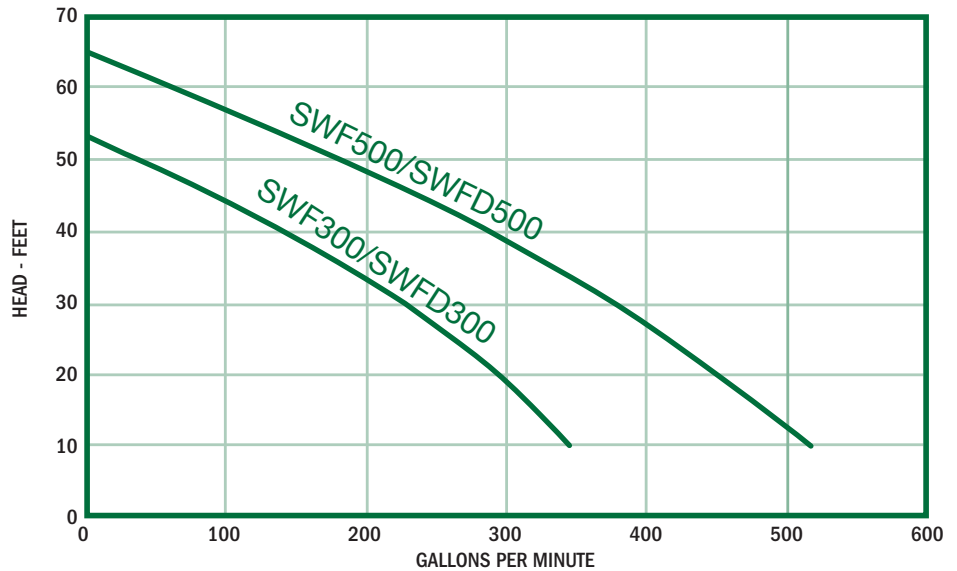

### Features

- 3" NPT Discharge
- 2-Vane, Semi-open Cast Iron Impeller
- Cast Iron Motor Housing and Volute
- Mechanical Carbon Ceramic Seal
- 20' Cord
- SWF300 Handles 2-1/2" Solids  
SWF500 Handles 3" Solids



### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Nema Start Code	Cord Type	Cord Power Size	Cord O.D.
SWF300M2-20/SWFD300M2-20	3	60	230/1	1750	28.0	D	SOW	8AWG/4C	1.0
SWF300M3-20/SWFD300M3-20	3	60	230/3	1750	20.0	D	SOW	12AWG/4C	.7
SWF300M4-20/SWFD300M4-20	3	60	460/3	1750	10.0	D	SOW	12AWG/4C	.7
SWF300M5-20/SWFD300M5-20	3	60	208/1	1750	33.5	D	SOW	8AWG/4C	1.0
SWF300M6-20/SWFD300M6-20	3	60	208/3	1750	18.0	D	SOW	12AWG/4C	.7
SWF500M2-20/SWFD500M2-20	5	60	230/1	1750	45.6	D	SOW	6AWG/4C	1.2
SWF500M3-20/SWFD500M3-20	5	60	230/3	1750	23.6	D	SOW	12AWG/4C	.7
SWF500M4-20/SWFD500M4-20	5	60	460/3	1750	11.8	D	SOW	12AWG/4C	.7
SWF500M5-20/SWFD500M5-20	5	60	208/1	1750	46.0	D	SOW	6AWG/4C	1.2
SWF500M6-20/SWFD500M6-20	5	60	208/3	1750	24.0	D	SOW	12AWG/4C	.7


# SEWAGE PUMPS

Models: SWH50, SWH100, SWH150, SWH200, SWHD100, SWHD150 & SWHD200

Cast Iron Sewage Pumps




Performance Curve

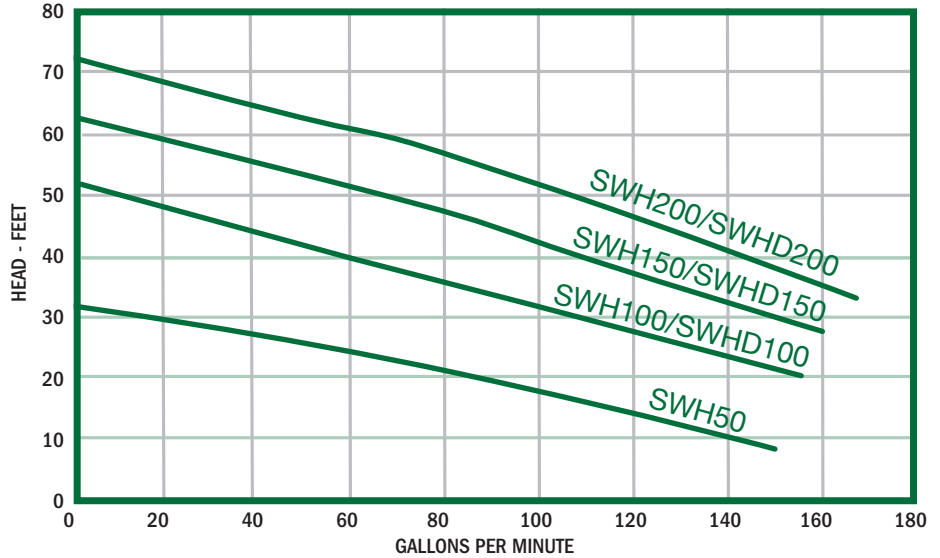

## Features

- 2" NPT Flanged Discharge, 3" NPT Optional
- 9-Vane, Vortex Cast Iron Impeller
- Cast Iron Motor Housing and Volute
- Mechanical Carbon Ceramic Seal
- 20' Cord
- Handles 2" Solids



## Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Cord Type	Cord Power Size	Cord O.D.
SWH50M1-20	1/2	60	115/1	3450	12.0	SOW	16AWG/3C	.430
SWH50M2-20	1/2	60	230/1	3450	6.0	SOW	16AWG/3C	.430
SWH50M3-20	1/2	60	230/3	3450	4.5	SOW	16AWG/4C	.460
SWH50M4-20	1/2	60	460/3	3450	2.3	SOW	16AWG/4C	.460
SWH50M5-20	1/2	60	208/1	3450	7.5	SOW	16AWG/3C	.430
SWH50M6-20	1/2	60	208/3	3450	4.7	SOW	16AWG/4C	.460
SWH100M2-20/SWHD100M2-20	1	60	230/1	3450	11	SOW	16AWG/3C	.430
SWH100M3-20/SWHD100M3-20	1	60	230/3	3450	6.6	SOW	16AWG/4C	.460
SWH100M4-20/SWHD100M4-20	1	60	460/3	3450	3.3	SOW	16AWG/4C	.460
SWH100M5-20/SWHD100M5-20	1	60	208/1	3450	12	SOW	16AWG/3C	.430
SWH100M6-20/SWHD100M6-20	1	60	208/3	3450	6.8	SOW	16AWG/4C	.460
SWH150M2-20/SWHD150M2-20	1-1/2	60	230/1	3450	13.8	SOW	14AWG/3C	.575
SWH150M3-20/SWHD150M3-20	1-1/2	60	230/3	3450	7.6	SOW	16AWG/4C	.460
SWH150M4-20/SWHD150M4-20	1-1/2	60	460/3	3450	3.8	SOW	16AWG/4C	.460
SWH150M5-20/SWHD150M5-20	1-1/2	60	208/1	3450	15	SOW	14AWG/3C	.575
SWH150M6-20/SWHD150M6-20	1-1/2	60	208/3	3450	7.8	SOW	16AWG/4C	.460
SWH200M2-20/SWHD200M2-20	2	60	230/1	3450	18	SOW	14AWG/3C	.575
SWH200M3-20/SWHD200M3-20	2	60	230/3	3450	9	SOW	16AWG/4C	.460
SWH200M4-20/SWHD200M4-20	2	60	460/3	3450	4.5	SOW	16AWG/4C	.460
SWH200M5-20/SWHD200M5-20	2	60	208/1	3450	20	SOW	12AWG/3C	.655
SWH200M6-20/SWHD200M6-20	2	60	208/3	3450	10.4	SOW	16AWG/4C	.460


# SEWAGE PUMPS

## Models: SWH300, SWH500, SWHD300 and SWHD500

Cast Iron Sewage Pumps




**Performance Curve**

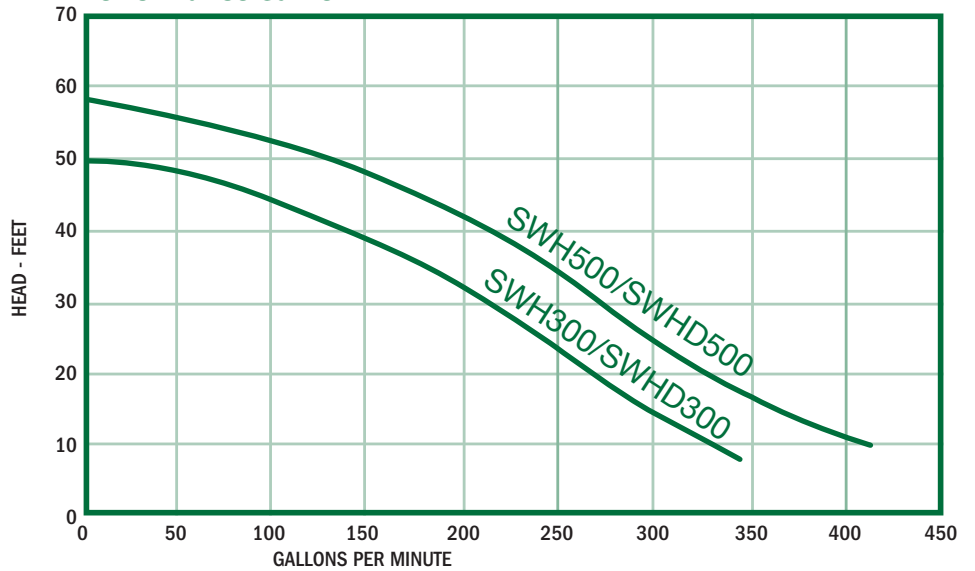

### Features

- 3" NPT
- 9-Vane, Vortex Cast Iron Impeller
- Cast Iron Motor Housing and Volute
- Mechanical Carbon Ceramic Seal
- 20' Cord
- SWH300 Handles 2-1/2" Solids  
SWH500 Handles 3" Solids



### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Nema Start Code	Cord Type	Cord Power Size	Cord O.D.
SWH300M2-20/SWHD300M2-20	3	60	230/1	1750	28.0	D	SOW	8AWG/4C	1.0
SWH300M3-20/SWHD300M3-20	3	60	230/3	1750	20.0	D	SOW	12AWG/4C	.7
SWH300M4-20/SWHD300M4-20	3	60	460/3	1750	10.0	D	SOW	12AWG/4C	.7
SWH300M5-20/SWHD300M5-20	3	60	208/1	1750	33.5	D	SOW	8AWG/4C	1.0
SWH300M6-20/SWHD300M6-20	3	60	208/3	1750	18.0	D	SOW	12AWG/4C	.7
SWH500M2-20/SWHD500M2-20	5	60	230/1	1750	45.6	D	SOW	6AWG/4C	1.2
SWH500M3-20/SWHD500M3-20	5	60	230/3	1750	23.6	D	SOW	12AWG/4C	.7
SWH500M4-20/SWHD500M4-20	5	60	460/3	1750	11.8	D	SOW	12AWG/4C	.7
SWH500M5-20/SWHD500M5-20	5	60	208/1	1750	46.0	D	SOW	6AWG/4C	1.2
SWH500M6-20/SWHD500M6-20	5	60	208/3	1750	24.0	D	SOW	12AWG/4C	.7


# GRINDER PUMP

## Model: AGPR

Cast Iron Single Seal Grinder Pump



### Performance Curve

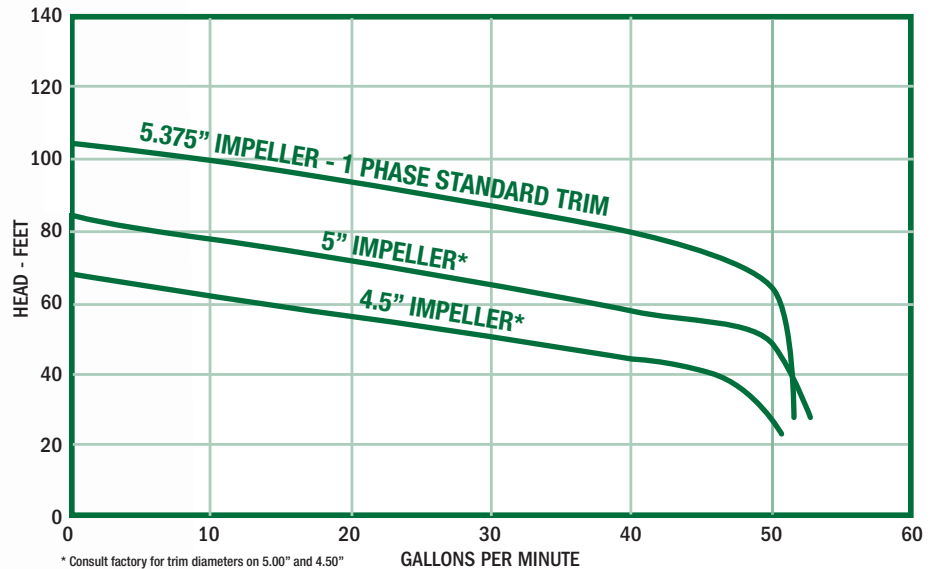


\* Consult factory for trim diameters on 5.00" and 4.50"

### Features

- 1-1/4" NPT + Flanged Horizontal with Vertical Adapter
- 10-Vane, Open Noryl™ Impeller
- Cast Iron Motor Housing and Volute
- Mechanical Carbon Ceramic Seal
- 20' Cord Standard, 35' Cord Optional
- Handles Domestic Wastewater with Fibrous Solids



Hybrid Cutters  
440 SST, Hardened  
(Patent Pending)



Leg Kit Included



Optional:  
• Manual with 20' & 35'  
Cord Lengths  
• 3' Integral switch  
• 20' & 35' Piggyback

### Specifications

MODEL	HP	HZ	VOLTS/PH	RPM	FULL LOAD AMPS	NEMA START CODE	CORD TYPE	CORD SIZE	CORD OD	SOLID STATE RELAY	START CAPACITOR	RUN CAPACITOR	SWITCH TYPE
AGPR200M2-20	2	60	230/1	3450	15	G	SJTOW	14 AWG/3C	.36-.37	SAMUSCO ECS225P	MARS 11068	MARS 12248	N/A
AGPR200M2-35	2	60	230/1	3450	15	G	SJTOW	14 AWG/3C	.36-.37	SAMUSCO ECS225P	MARS 11068	MARS 12248	N/A
AGPR200W2-20	2	60	230/1	3450	15	G	SJTOW	14 AWG/3C	.36-.37	SAMUSCO ECS225P	MARS 11068	MARS 12248	INTEGRAL
AGPR200W2-35	2	60	230/1	3450	15	G	SJTOW	14 AWG/3C	.36-.37	SAMUSCO ECS225P	MARS 11068	MARS 12248	INTEGRAL
AGPR200WP2-20	2	60	230/1	3450	15	G	SJTOW	14 AWG/3C	.36-.37	SAMUSCO ECS225P	MARS 11068	MARS 12248	PIGGY-BACK
AGPR200WP2-35	2	60	230/1	3450	15	G	SJTOW	14 AWG/3C	.36-.37	SAMUSCO ECS225P	MARS 11068	MARS 12248	PIGGY-BACK


# PREPLUMBED LAUNDRY PACKAGE SYSTEM

## Model: LAUNDRYPKG

Laundry Basin and Sump Pump



### Performance Curve

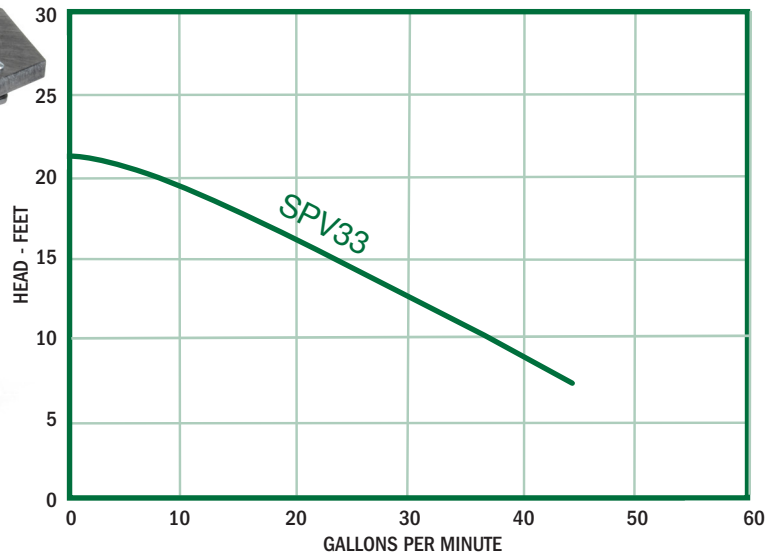

### Features

- Package Includes: Laundry Basin, SPV33, Pre-plumbed with check valve
- 15" X 15" (6 Gallon) Structured Foam, Pre-plumbed Sump Basin
- For New Or Existing Installations
- Sump Pump Is Heavy Duty Cast Iron Construction
  - Strong PSC Continuous Duty Rated Motor
  - Vortex Thermoplastic Impeller
  - Discharge Size 1-1/2" NPT
  - Single Mechanical Carbon Ceramic Seal

### Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Cord Type
SPV33	1/3	60	115	1750	6.5	SJTW 18/3C


# PREPLUMBED SUMP PACKAGE SYSTEM

## Model: APSB1824

Sump Basin and Sump Pump



### Performance Curve

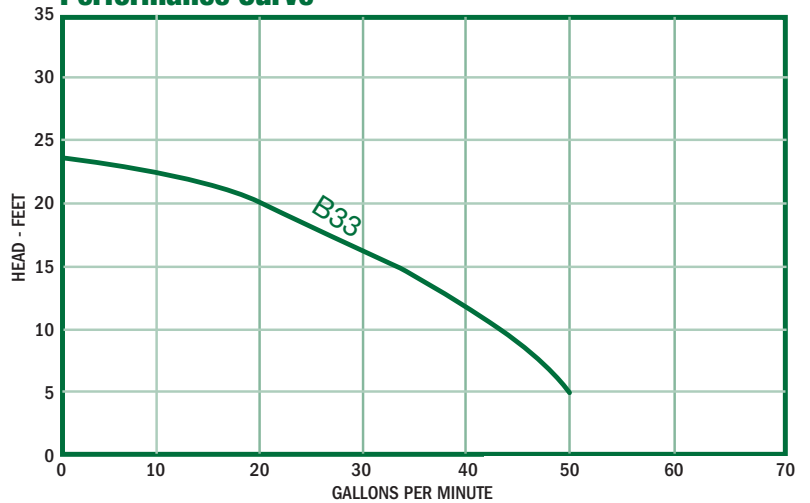


### Features

- Package Includes: B-Series 1/3 HP Pump, Sump Basin, Pre-plumbed with check valve
- 18" X 24" (24 Gallon) Structured Foam, Pre-plumbed Sump Basin
- For New Or Existing Installations
- Sump Pump Is Heavy Duty Cast Iron Construction
  - Strong PSC Continuous Duty Rated Motor
  - Recessed Vortex Thermoplastic Impeller To Reduce Clogging
  - Discharge Size 1-1/2" NPT
  - Single Mechanical Carbon Ceramic Seal
  - Piggyback Plug Standard

### B33 Pump Specifications

Model	HP	Hz	Volts/Ph	RPM	Full Load Amps	Cord Type
B33	1/3	60	115	3450	5.0	SJTW 18/3C




# PREPLUMBED SEWAGE PACKAGE SYSTEM

## Model: SEW24PKG

Sewage Basin and Sewage Pump



**Performance Curve**

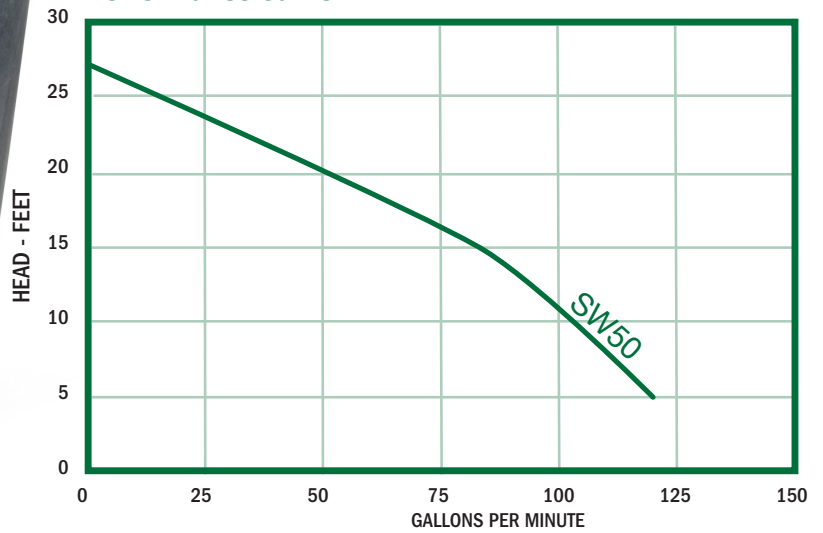

### Features

- Package Includes: Sewage Basin, SW50 Pump, Pre-plumbed with check valve
- 24" X 24" (45 Gallon) Structured Foam, Pre-plumbed Sewage Basin
- For New Or Existing Installations
- Sewage Pump Is Heavy Duty Cast Iron Construction
  - Strong PSC Continuous Duty Rated Motor
  - Cast Iron Impeller
  - Discharge Size 2" NPT
  - Single Mechanical Carbon Ceramic Seal
  - Handles 2" Solids

### SW50 Pump Specifications

Model	HP	Volt	Ph	Nema Start Code	Full Load Amps	Cord Size	Cord Type	Cord O.D. Inches (mm)
SW50M1-20	1/2	115	1	P	12.0	16AWG/3C	SJTOW	.325-.360


# PREPLUMBED SEWAGE PACKAGE SYSTEM

## Model: APSWB1830

Sewage Basin and Sewage Pump



### Performance Curve

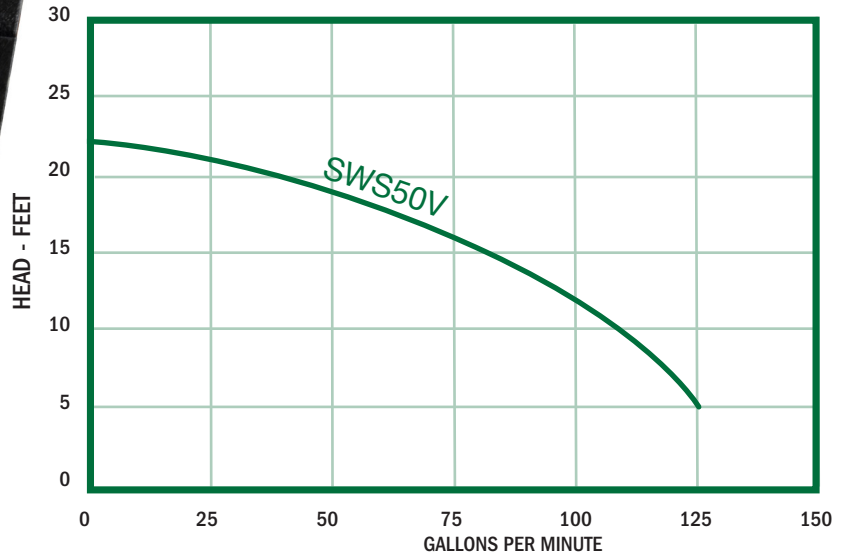

### Features

- Package Includes: Sewage Basin, SWS50V1-10, Pre-plumbed with check valve
- 18" X 30" (30 Gallon) Structured Foam, Pre-plumbed Sewage Basin
- For New Or Existing Installations
- Sewage Pump Is Heavy Duty Cast Iron Construction
  - Strong PSC Continuous Duty Rated Motor
  - Vortex Thermoplastic Impeller
  - Discharge Size 2" NPT
  - Single Mechanical Carbon Ceramic Seal
  - Handles 2" Solids

### Specifications

Model	HP	Volt	Ph	Nema Start Code	Full Load Amps	Cord Size	Cord Type	Cord O.D. Inches (mm)
SWS50V1-10	1/2	115	1	P	12.0	16AWG/3C	SJTOW	.325-.360



# ACCESSORIES

## CHECK VALVES

### EFUNCV150 (SUMP)

Inline sump pump  
check valve, 1-1/2"



### EFSWCV200 (SEWAGE)

Sewage pump  
check valve, 2"



### EFCVP200 (SEWAGE)

Sewage pump  
plastic check  
valve, 2"



## FLOAT SWITCHES

### 060M3A002 (PIGGYBACK WIDE ANGLE)



## ALARMS

### 10A500 (HIGH WATER ALARM)



### 1033578 115V OIL SPOTTER SYSTEM WITH TANK ALERT



### 1037723 230V OIL SPOTTER SYSTEM WITH TANK ALERT



## HOSE KIT

### HOSE150 (1-1/2")

Sump pump basin hose, with 1-1/4" x 1-1/4" and 1-1/2" x 1-1/4" barbed adapters. Plus hose clamp



## GRINDER ADAPTER

RWG for rail systems



## MARS KITS

- MARS KIT-160 ANC200M2
- MARS KIT-161 AGP-HC200M2E
- MARS KIT-162 ANC300M2
- MARS KIT-163 ANC500M2
- MARS KIT-164 ANC750M2
- MARS KIT-165 AGP300M2
- MARS KIT-166 AGP500M2 & AGP750M2
- MARS KIT-167 SW300M2 & SW500M2



# ASHLAND PUMP WARRANTY

Ashland Pump warrants the original purchaser of each product for a period of three (3) years from date of manufacture or installation. Obligation under this warranty is limited to repairing or replacing any part, thereof, which shall within 1 year be returned to us with transportation charges prepaid and proved to be defective.

The above limited warranty takes the place of all other warranties, express or implied and correction of such defects by replacement or repair shall constitute a fulfillment of all obligations under the terms of the warranty, which specifically EXCLUDES any incidental damages caused by or associated with this product or its use. The warranty does not cover any unit which has been damaged either in transit or by misuse, accident or negligence. No warranty or representative not contained herein shall be binder.





**P U M P**

***Honest, Professional, Dependable***

1899 Cottage Street, Ashland, Ohio 44805  
Telephone: 855 281-6830 • Fax: 877 326-1994  
[ashlandpump.com](http://ashlandpump.com)